


Electric instantaneous water heaters

# EPP Maximus electronic

Water heater with the highest efficiency of hot water production



## Application

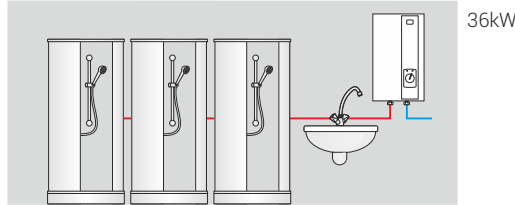

## Most important advantages




**Copper shielded heating elements**  
Reliable technology ensures long life, resistance to water decay and air bubbles




**Electronic control system**  
Ensures stability and smooth regulation of water temperature from 30° - 60°C



**Water flow sensor**  
Sensor operates at very low pressure 0,1MPa and water flow as little as 2,5 l/min.




Can work on already preheated water. Inlet water temperature up to 70°C.



**Priority switch**  
Cooperation with another electric high power consumption appliance.

## Dimensions

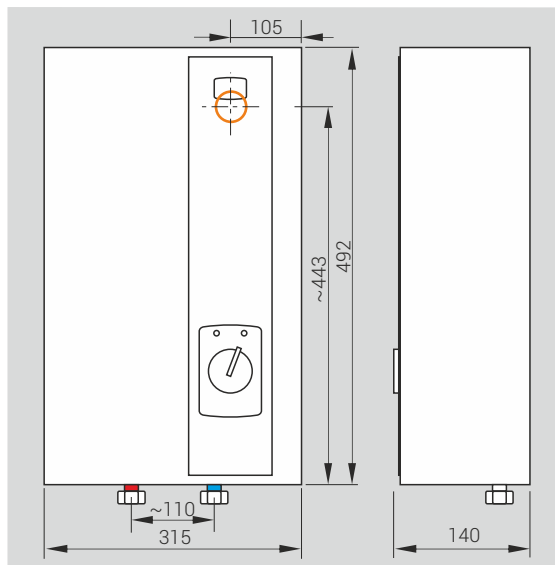

Supply water pressure	0,12 - 0,6 MPa
Inlet and outlet section	Gz 1/2" *
Safety class	IP 24
Energy efficiency class	<b>A</b>

\* Inlet and outlet pipes connected to the heater must be made of copper or steel

- Electric cable connection point
- Cold water inlet
- Hot water inlet

## Technical data

Type	Rated power / Rated voltage	Rated current (A)	Min. connecting wires section (mm <sup>2</sup> )	Efficiency (Δt=30°) (l/min.)
EPP-36 MAXIMUS	36 kW / 400V 3~	3x52,0	4 x 10	17,3