


Electric instantaneous water heaters

PPH2 hydraulic


Multipoint water heater at the lowest price



Application



12-15kW

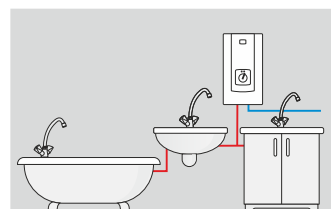

from 18kW

Most important advantages



Power regulation


Allows to set the heater on full power or economic mode.






Automatically switches on 2 steps of heating

Automatic "switch on" system and power selection according to the water flow rate.

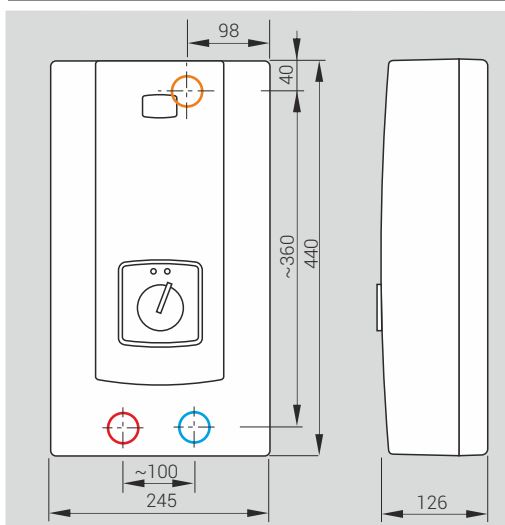Dimensions



Supply water pressure	0,15 - 0,6 MPa 9-15 kW 0,2 - 0,6 MPa 18 kW 0,25 - 0,6 MPa 21 kW
Inlet and outlet section	Gw 1/2"
Safety class	IP 25
Energy efficiency class	A

-  Electric cable connection point
-  Cold water inlet
-  Hot water inlet

Technical data

Type	Rated power / Rated voltage	Rated current (A)	Min. connecting wires section (mm ²)	Efficiency ($\Delta t=30^\circ$) (l/min.)
PPH2-09	9 kW / 400V 3~	3x13,0	4 x 1,5	4,3
PPH2-12	12 kW / 400V 3~	3x17,3	4 x 2,5	5,8
PPH2-15	15 kW / 400V 3~	3x21,7	4 x 2,5	7,2
PPH2-18	18 kW / 400V 3~	3x26,0	4 x 4	8,7
PPH2-21	21 kW / 400V 3~	3x30,3	4 x 4	10,1